PANDA

The Bevel Paver


The art of exceptional paving.





The Bevel Paver

Specifications



Thickness Availability	55mm
Length x Width (mm)	200 x 100mm
No. Blocks p/m²	50/m²
Strength / Class	30Mpa / 2.0
General Application	Domestic driveways, municipal parking, pedestrian pavements, parkways, commercial developments, petrol station forecourts.


Colour Availability




Brown | Charcoal | Multi | Red | Tan

Laying Pattern


Herringbone

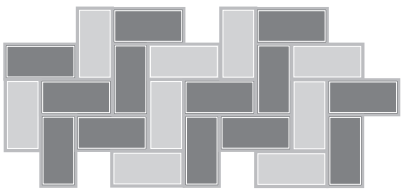

Basket Weave

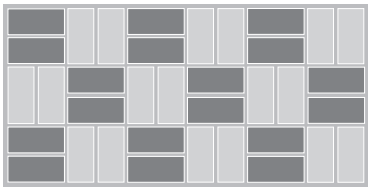

Stretcher Bond

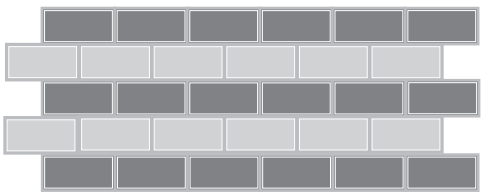

Disclaimer

Panda reserves the rights to amend the above specifications without notice.
The photographs in the brochure do not necessarily reflect actual product colour.

Product is BOBS
BOS 29 – Certified

Manufacturing Plants:

Francistown:
Tel: +267-244 2106/7/8
Fax: +267-244 2109/10
email: sales@panda.co.bw
P/Bag F36, Farm NQ 26
Monarch, Francistown
GPS: 21°07'11"S, 27°29'53"E

Gaborone:
Tel: +267-350 0838
Fax: +267-350 0839
email: salesgabs@panda.co.bw
P/Bag 115, Plot 20605,
Broadhurts Industrial, Gaborone
GPS: 24°37'04"S, 25°55'11"E

PANDA

Head Office:
P/Bag F36, Farm NQ 26
Monarch, Francistown
Botswana
Tel: +267-244 2106/7/8
Fax: +267-244 2109/10
Email: sales@panda.co.bw
Website: www.panda.co.bw