PANDA

The Interlocking Paver


Where strength meets style.






The Interlocking Paver

Specifications






Thickness Availability	60mm	80mm
Length x Width (mm)	220 x 97mm	220 x 97mm
No. Blocks p/m²	48/m²	48/m²
Strength / Class	30Mpa / 2.0	30Mpa / 2.0 40Mpa / 2.6
General Application	Petrol stations forecourts, industrial & factory roads, suburban streets, etc.	Industrial roads, heavy duty loading bays, platforms and industrial areas used by forklifts.

Colour Availability



Brown Charcoal Multi Red Tan

Laying Pattern

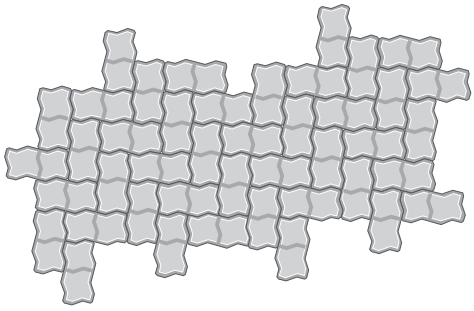

Disclaimer

Panda reserves the rights to amend the above specifications without notice.
The photographs in the brochure do not necessarily reflect actual product colour.

Product is BOBS
BOS 29 – Certified

Manufacturing Plants:

Francistown:
Tel: +267-244 2106/7/8
Fax: +267-244 2109/10
email: sales@panda.co.bw
P/Bag F36, Farm NQ 26
Monarch, Francistown
GPS: 21°07'11"S, 27°29'53"E

Gaborone:
Tel: +267-350 0838
Fax: +267-350 0839
email: salesgabs@panda.co.bw
P/Bag 115, Plot 20605,
Broadhurts Industrial, Gaborone
GPS: 24°37'04"S, 25°55'11"E

PANDA

Head Office:
P/Bag F36, Farm NQ 26
Monarch, Francistown
Botswana
Tel: +267-244 2106/7/8
Fax: +267-244 2109/10
Email: sales@panda.co.bw
Website: www.panda.co.bw