





Interlocking Paving



Interlocking Paving, economic yet intricately patterned


PANDA

Interlocking Paving

	General application	Thickness availability	Length X Width (mm)	No. Blocks p/m ²	Colour Availability	Classes
 	Petrol stations forecourts, industrial & factory roads, suburban streets, etc.	60mm	220 x 97mm	48/m ²	Multi, Red, Grey, Brown, Black & Tan	Class 30/2.0
	Industrial roads, heavy duty loading bays, platforms and industrial areas used by forklifts.	80mm	220 x 97mm	48/m ²		Class 40/2.6

30/2.0 is indicative of compressive strength of 30 Mpa and tensile splitting strength of 2.0 Mpa.
Panda reserves the rights to amend the above specifications without notice.
The photographs in the brochure do not necessarily reflect actual product colour.

Laying pattern

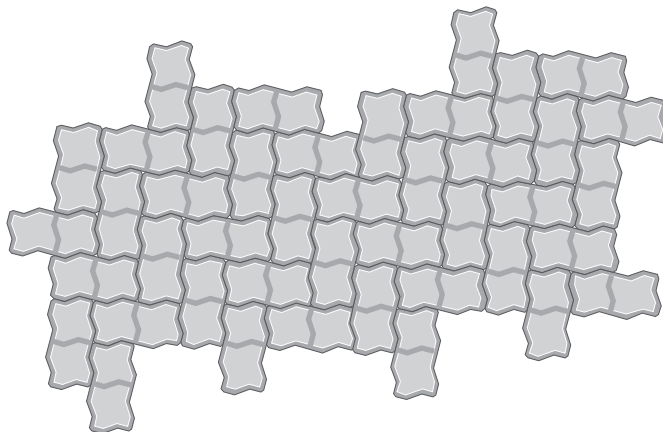

BOS 29 – Certified

Manufacturing Plants:

Francistown: Tel: +267-244 2106/7/8
Fax: +267-244 2109/10
email: sales@panda.co.bw
P/Bag F36, Farm NQ 26
Monarch, Francistown
GPS: 21°07'11"S, 27°29'53"E

Gaborone: Tel: +267-350 0838
Fax: +267-350 0839
email: sales@panda.co.bw
P/Bag 115, Plot 20605,
Broadhurts Industrial, Gaborone
GPS: 24°37'04"S, 25°55'11"E



Head Office: P/Bag F36, Farm NQ 26
Monarch, Francistown
Botswana
Tel: +267-244 2106/7/8
Fax: +267-244 2109/10
Email: sales@panda.co.bw
Website: www.panda.co.bw