



Clay Building Bricks

Durability forever, manufactured from mother earth

PANDA

Clay Building Bricks



General application

Thickness availability

Length X Width (mm)

Strength (Mpa)



For all general single and double skin walls on any building. Suitable for multi storey buildings.

- (NFP) Non face plaster.

73mm

222 x 110mm

10Mpa

- (NFX) Non face extra


73mm

222 x 110mm

14Mpa

30/2.0 is indicative of compressive strength of 30 Mpa and tensile splitting strength of 2.0 Mpa. Panda reserves the rights to amend the above specifications without notice. The photographs in the brochure do not necessarily reflect actual product colour.

Laying pattern

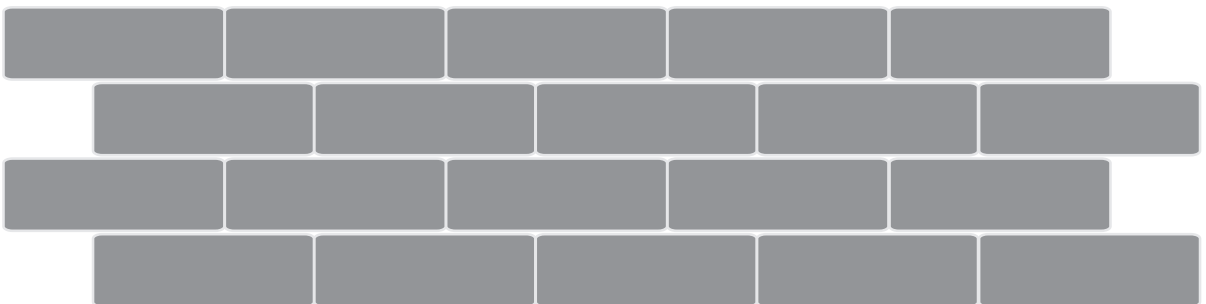

BOS 29 – Certified



Botswana
**Green Building
Council**

Manufacturing Plants:

Disposana: Tel: +267-713 78631
email: sales@panda.co.bw
rudi@panda.co.bw
P/Bag F38, Disposana Village
Disposana, Lobatse Area
GPS: 25°13'55"S, 25°26'05"E

Gaborone: Tel: +267-350 0838
Fax: +267-350 0839
email: sales@panda.co.bw
P/Bag 115, Plot 20605,
Broadhurts Industrial, Gaborone
GPS: 24°37'04"S, 25°55'11"E



Head Office: P/Bag F36, Farm NQ 26
Monarch, Francistown
Botswana
Tel: +267-244 2106/7/8
Fax: +267-244 2109/10
Email: sales@panda.co.bw
Website: www.panda.co.bw